


Mato Vukovic
Leher Landstr. 20
27607 Geestland
Germany

Phone: +49 4743 9338-0
Fax: +49 4743 9338-22

http://www.kemo-electronic.de
email: info@kemo-electronic.de

HR.Nr. HRB 111 486
UstNr: DE 814 380 369

The image shows a black rectangular remote control unit labeled "HARTEN DEFENCE RCM-1000". It features a digital display showing "0.00 Hz" and various status icons like a battery level indicator and signal strength. The unit has two green LEDs and a red LED. It is connected via a thick yellow cable to a series of small, square electronic modules, each containing a microchip and some passive components.

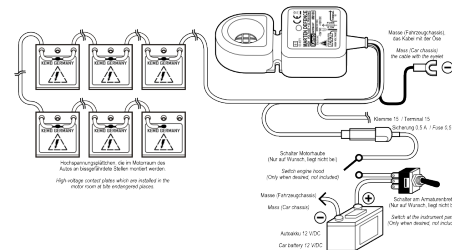

Technical Data:
 Operating voltage: 12 - 15 V/DC (car battery)
 Average power consumption: < 5 mA
 Automatic shutoff: if the battery voltage decreases to < 11,5 V ($\pm 5\%$)
 Output voltage: approx. 200 - 300 V/DC
 Ultrasonic frequency: approx. 22 kHz $\pm 10\%$
 Acoustic pressure: max. approx. 100 dB $\pm 15\%$
 Angle of radiation ultrasonics: approx. 150 degree
 Loudspeaker: special ceramic piezoelectric loudspeaker with spherical membrane of aluminium
 Temperature range: approx. -25 - +80°C
 Functional display: flashing LED (approx. every 5 - 12 sec.)
 Cable length high-voltage cable: 1 x approx. 4 m ($\pm 10\%$)
 Fuse in the fuse holder: 500 mA
 High-voltage contact plates: 6 pieces, approx. 40 x 40 x 1,5 mm each
 Dimensions basic instrument: approx. 125 x 70 x 31 mm (without cable entry point + LED).
 Suitable for vehicles with Can Bus.